

# LEKTRO


1190 S.E. Flightline Drive, Warrenton, Oregon 97146-9692

1-800-535-8767 • 503-861-2288 • Fax 503-861-2283

E-mail: sales@lektro.com

http://www.lektro.com

## Model **AP8600A-EZ** AIRCRAFT TOWING VEHICLE FOR AIRCRAFT UP TO 30,000 LBS/13,608 KG

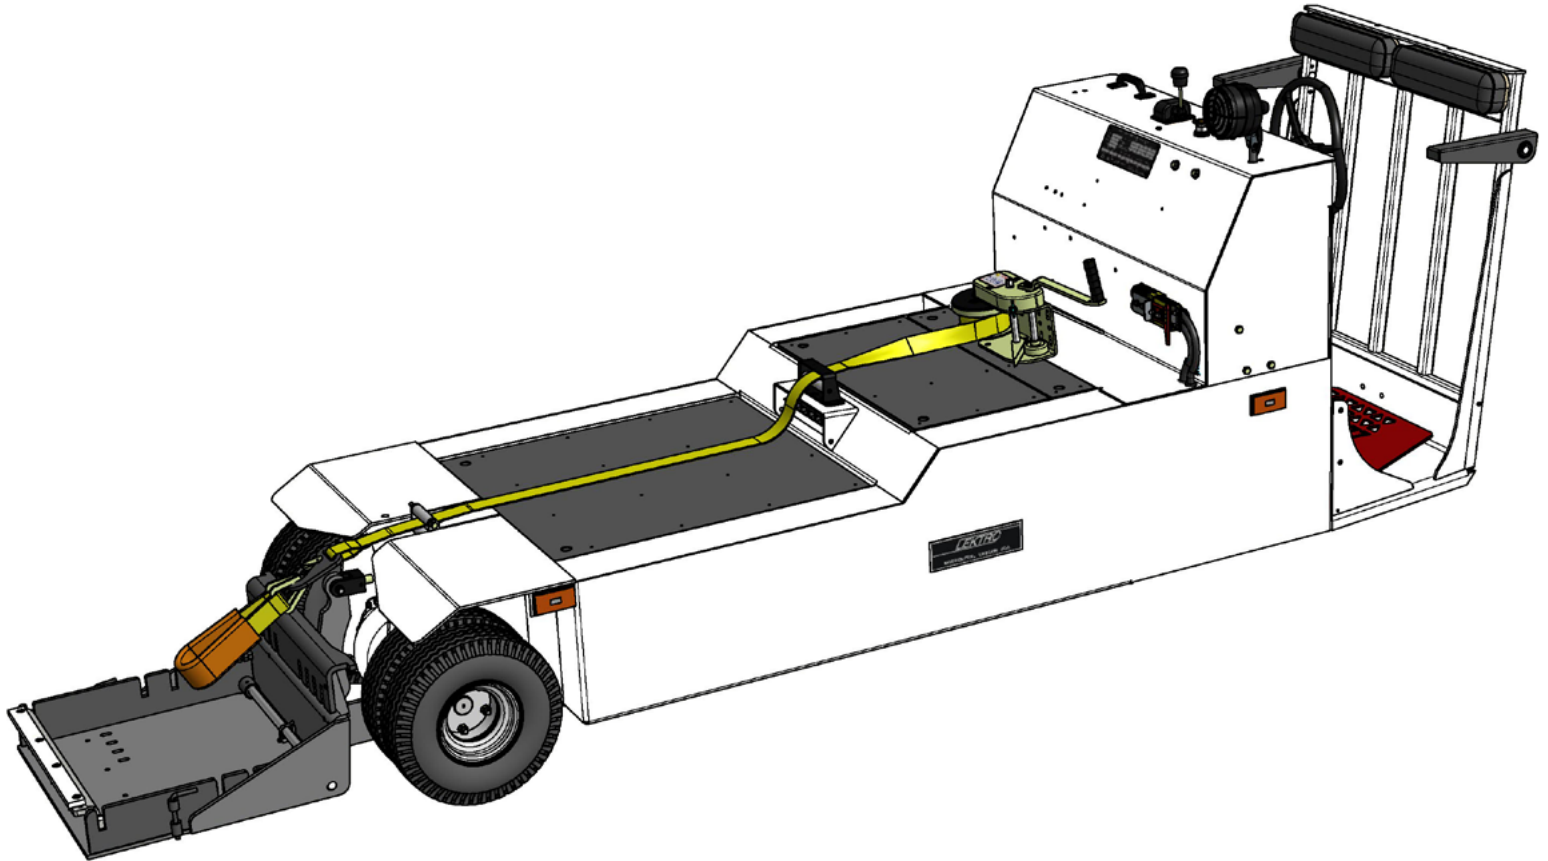

### AP8600A-EZ FEATURES:

**Vehicle Drive:** 6.8 HP/5.1 kW, 36 VDC Traction Motor mated with Dana 44 Differential. 11.8 HP/8.8 kW Motor and Limited Slip Differential, optional.

**Motor Speed Control:** EV-100 LX SCR with On-Board Diagnostics. Speed controlled by combination Hand Throttle/Directional Lever.

**Batteries:** Six 6 VDC, 350 AMP-HR Batteries (20 hr rate), wired in series. Single Point Watering System, optional.

**GPU:** Built-in 12/24/30 VDC / 800 CCA Motive/GPU Batteries. 12/24/28 VDC and 1175 CCA, optional. An Independent 1175 CCA Battery and Charging System also optional.

**Motive Battery Charger:** External Fully Automatic 36 AMP DC / 110 VAC / 60 Hz / 1-PH Charger. 230 VAC / 50 Hz, optional.

**Nose Gear Lift Cradle:** Patented Universal Nose Gear Lift Cradle activated by an Electric/Hydraulic Pump Assembly capable of handling dual and single wheel aircraft. A Hold Down provision for light-nosed aircraft, Wheel Faring Package and Aircraft Selection System, optional.

**Winch:** Heavy-duty 2-speed Hand Winch. Winch and Strut Straps included.

**Steering:** Automotive-type Wheel coupled to an Automotive Gear Box resulting in very responsive steering action.

**Service Brakes:** Foot Operated Hydraulic Disc-Type Service Brakes acting at Differential Pinion Shaft.

**Parking Brake:** Hand/Foot activated Electric Deadman Parking Brake.

**Drive Tires:** Dual 4.80/4.00 x 8 6-ply Pneumatic Highway Tread. Traction Tread, Poly-Foam and Chains, optional.

**Steer Tires:** Dual 4.80/4.00 x 8 6-ply Pneumatic Highway Tread. Poly-Foam and Steer Axle Suspension, optional.

**Lighting:** Single 360° Rotating Spotlight mounted on Cowl and Five Amber Reflectors. 2nd Spotlight, Rear Headlight, Four Flashing Amber Running Lights and LED Bulbs, optional.

**Extension Ladder:** Step Ladder attached to operator's back rest, optional.

**Operator's Compartment:** Two person configuration, Stand-Up Operation with Restraint.

**Construction:** Welded Steel Plate and Polymers preserved by Primer and Automotive High-Gloss Red or White Enamel Paint with special protective Polyurethane Coating to prevent rust, scratches and corrosion. Custom colors, optional.

### SPECIFICATIONS:

Length .....	150.25 in / 381.4 cm
Width .....	41.5 in / 105.1 cm
Height (at top of steering wheel).....	49 in / 124.6 cm
Turning Radius .....	127.5 in / 323.9 cm
Wheel Base.....	79.25 in / 201.2 cm
Vehicle Speed, Empty .....	6.6 MPH / 10.6 KPH
Vehicle Speed, Loaded (To max. Vehicle Capacity) .....	4.5 MPH / 7.2 KPH
**Lift Cradle Capacity.....	3000 LBS / 1361 KG
Nose Gear Cradle Lifting Height.....	9 in / 23 cm
Ground Clearance .....	3.5 in / 9 cm
Shipping Weight w/ Batteries & Charger .....	2700 LBS / 1225 KG

\*\*Lift Capacity is calculated with 14 in / 35.6 cm diameter aircraft tire in lift cradle. Aircraft tire centerline at 18.5 in / 47 cm from drive tire centerline.

### ADDITIONAL OPTIONS:

Draw Bar Pin, Specialized Aircraft Towing Adapters and Custom Highlift Adapters are available (consult factory). Illustration may show some optional equipment.

\*LEKTRO reserves the right to make changes and improvements in products and specifications without notice or obligation.

PATENT Nos. 5,151,003 / 5,302,075 / 9,067,691.

Other Patents Pending.

07/15

# LEKTRO

1190 S.E. Flightline Drive, Warrenton, Oregon 97146-9692

1-800-535-8767 • 503-861-2288 • Fax 503-861-2283

E-mail: [sales@lektro.com](mailto:sales@lektro.com)

<http://www.lektro.com>

## Model AP8600A-EZ

### AIRCRAFT TOWING VEHICLE

FOR AIRCRAFT UP TO 30,000 LBS/13,608 KG

